

1/15

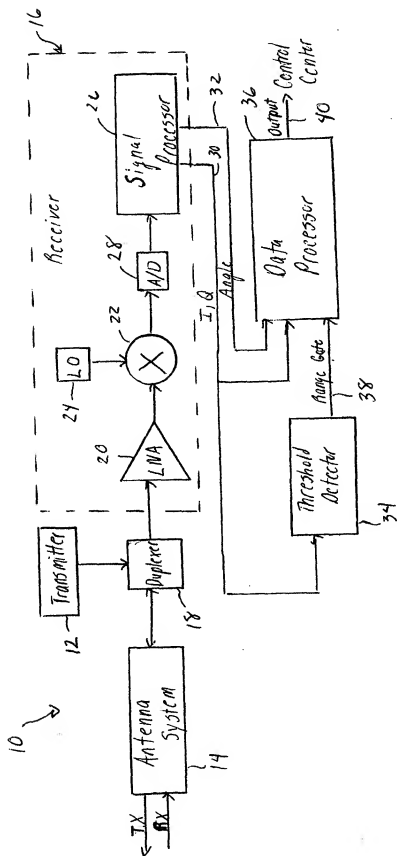


FIG. 1

2/15

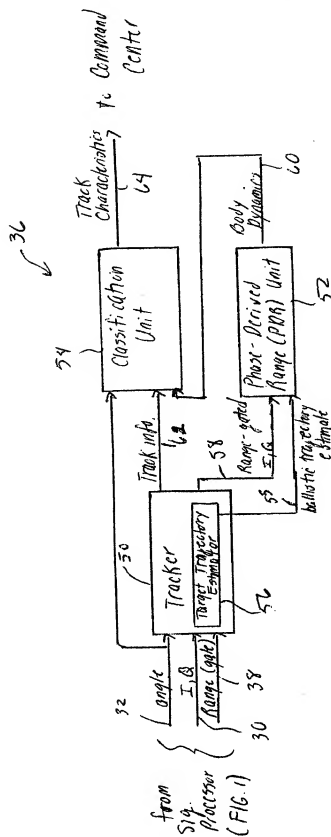


FIG. 2

3/15

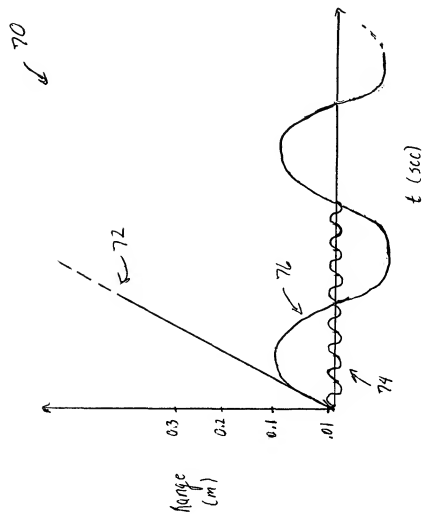


FIG. 3

4/15

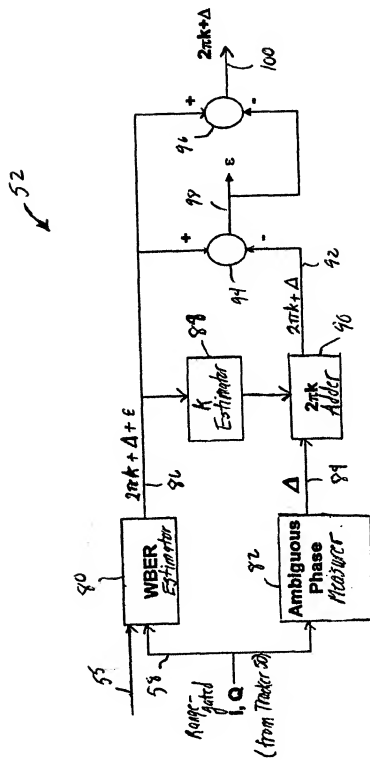


FIG. 4

5/15

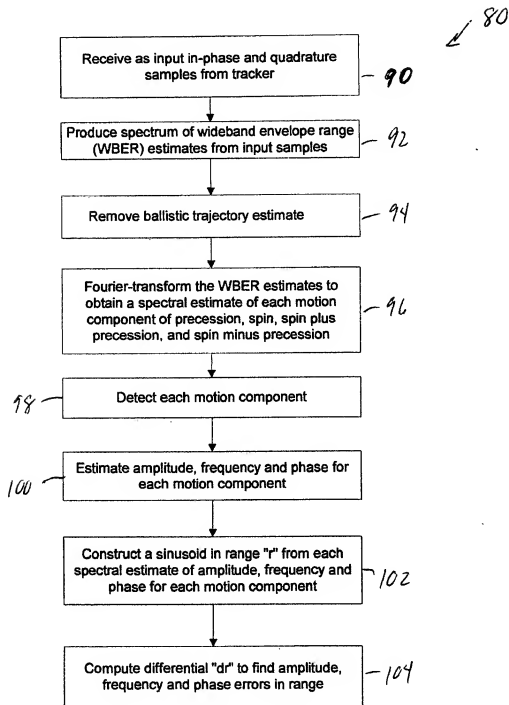


FIG. 5

6/15

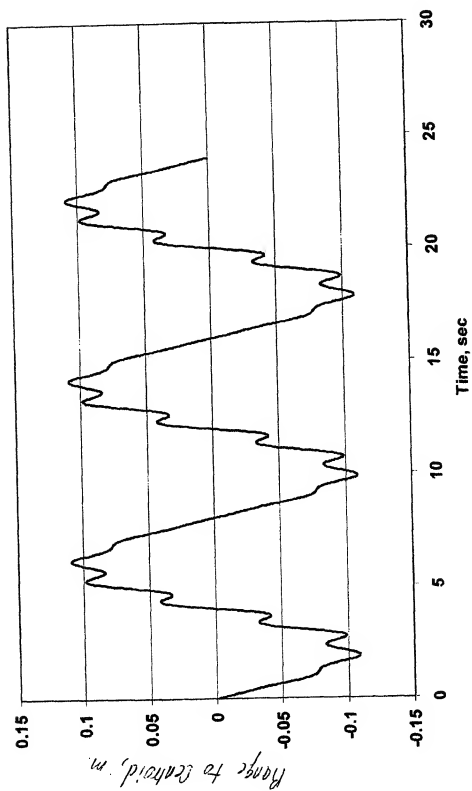


FIG. 6

7/15

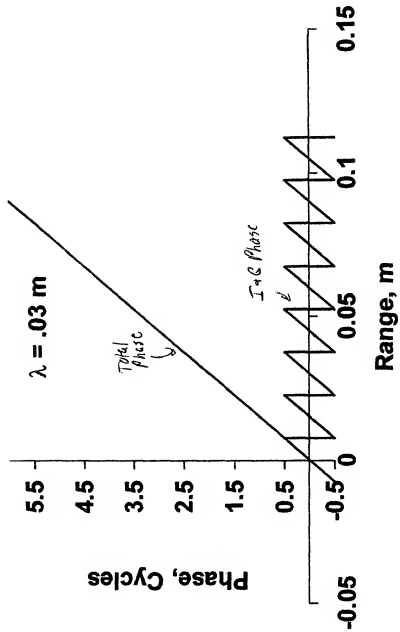


FIG. 7

8/15

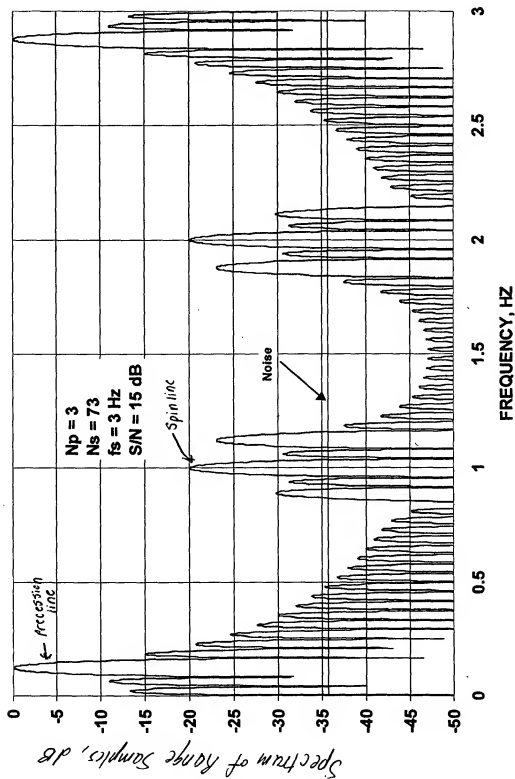


FIG. 8

9/15

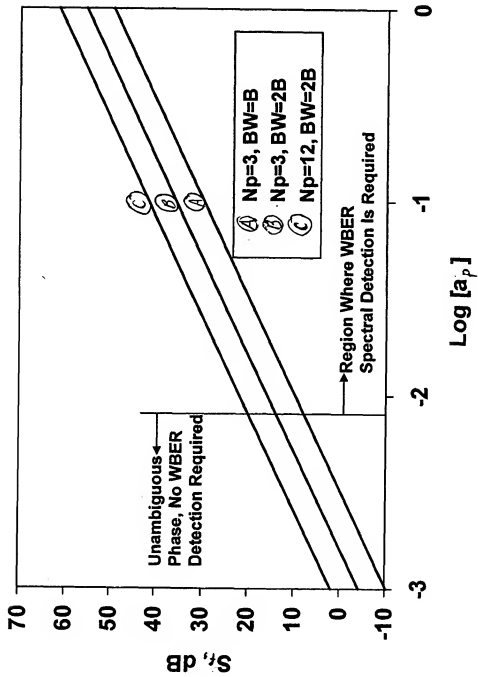


FIG. 9

10/15

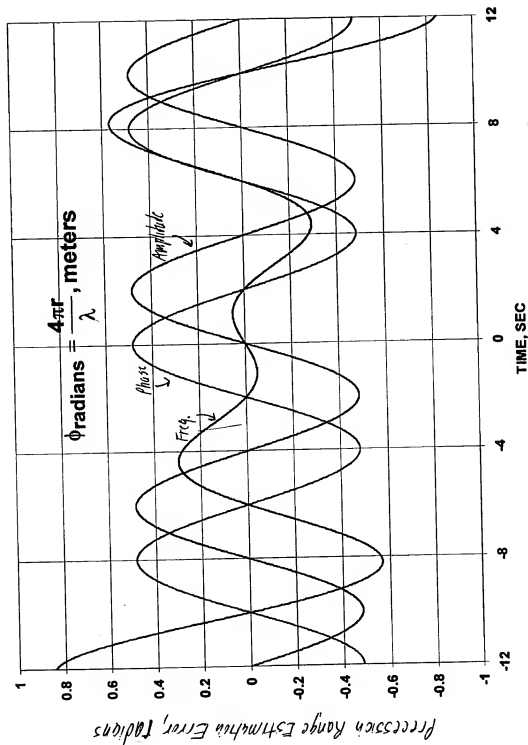


FIG. 10

11/15

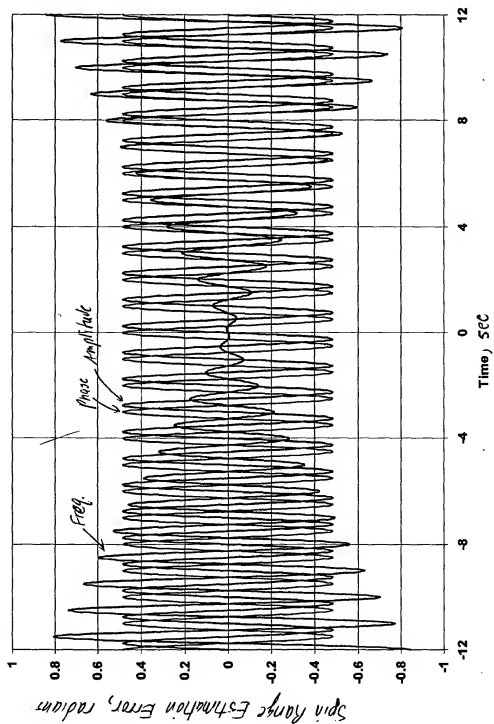


FIG. 11

12/15

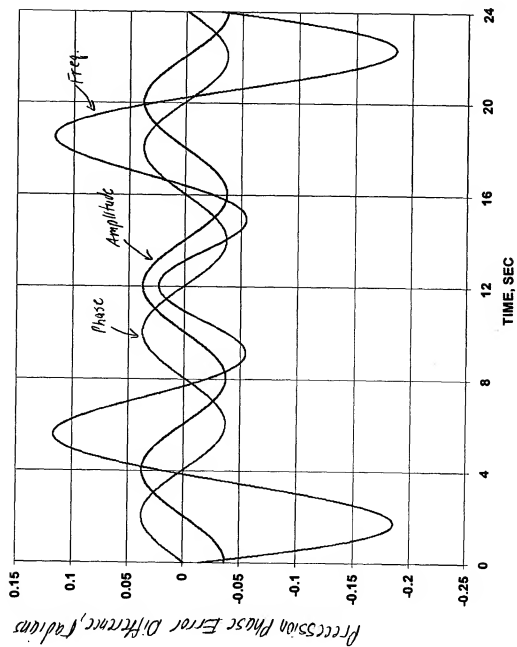


FIG. 12

13/15

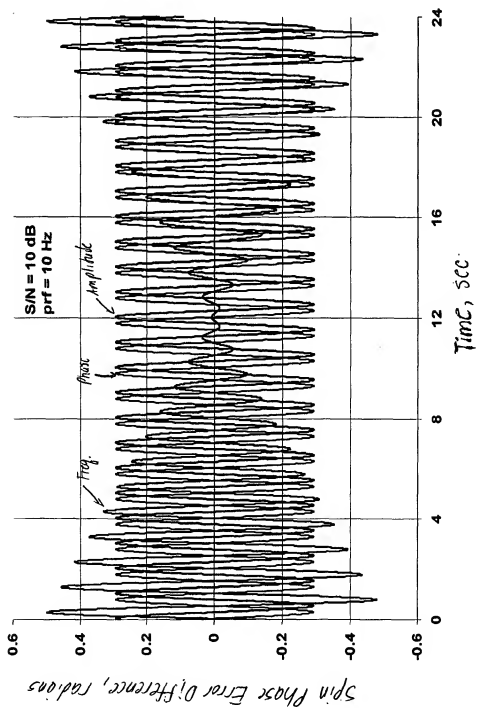


FIG. 13

AN IMPROVED PROCESS FOR PHASE-DERIVED RANGE MEASUREMENTS

Fritz Steudel
RTN-175PUS

14/15

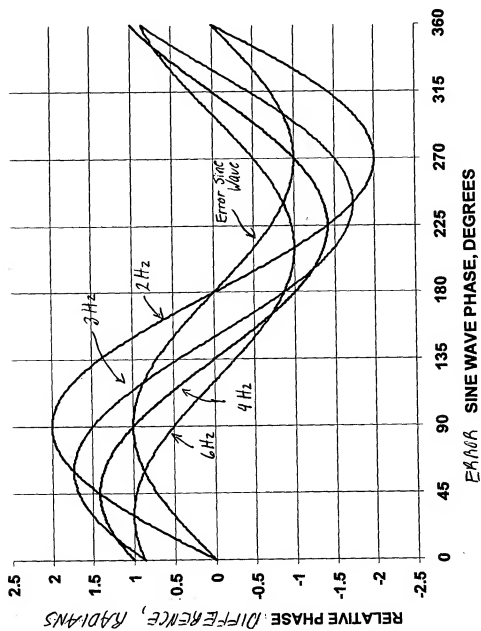


FIG. 14

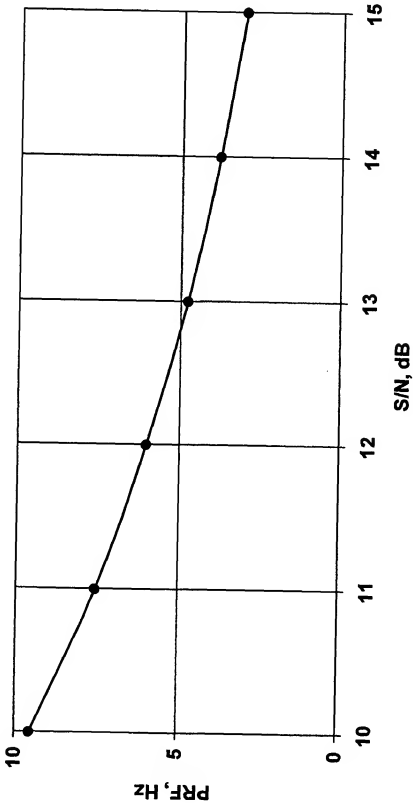


FIG. 15